

INSTRUCTIONS P/N 08P48-SNA-100 4-DOR Issue Date AUG 2009 PARTS LIST Rear bumper applique INSTALLATION Applicator In the rear bumper applique should be installed only if ambient air temperature is 15°C (60°F) or above. H the rear bumper applique and bonding surfaces with hair dryer set on LOW if the ambient air temperatur is below. Soft sleeve Image: Clean the rear bumper applique will attach. Alcohol swab Image: Clean the rear bumper applique will attach. TOOLS AND SUPPLIES REQUIRED Masking tape Felt-tip pen	INSTALLATION	Accessory REAR BUMPER APPLIQUE	Application 2010 CIVIC	Publications No. All 42458
Rear bumper applique Applicator Applicator Soft sleeve Alcohol swab Clean. Clean. Clean. Clean. Clean. Clean. Clean. Clean. Clean. Alcohol swab	INSTRUCTIONS			
Applicator Applicator Applicator Soft sleeve Alcohol swab TOOLS AND SUPPLIES REQUIRED Masking tape Felt-tip pen	PARTS LIST	IN	ISTALLATION	
Applicator Applicator Soft sleeve Alcohol swab TOOLS AND SUPPLIES REQUIRED Masking tape Felt-tip pen	Rear bumper applique		OTE:	
Applicator Applicator Soft sleeve Alcohol swab TOOLS AND SUPPLIES REQUIRED Masking tape Felt-tip pen		•		rear bumper and other
Alcohol swab TOOLS AND SUPPLIES REQUIRED Masking tape Felt-tip pen	Applicator	•	ambient air temperature is 15° the rear bumper applique and hair dryer set on LOW if the a	°C (60°F) or above. Hea bonding surfaces with a
Soft sleeve Alcohol swab TOOLS AND SUPPLIES REQUIRED Masking tape Felt-tip pen				4 hours to cure the
Alcohol swab		1.		
Alcohol swab TOOLS AND SUPPLIES REQUIRED Masking tape Felt-tip pen	Soft sleeve			
TOOLS AND SUPPLIES REQUIRED	Alcohol swab		Clean.	
	Masking tape Felt-tip pen	ED	REAR BUMPER	ALCOHOL SWAB


2. Attach masking tape to the rear bumper applique, then mark on the masking tape as shown.




3. Place the rear bumper applique on the rear bumper, then attach masking tape to the rear bumper as shown.

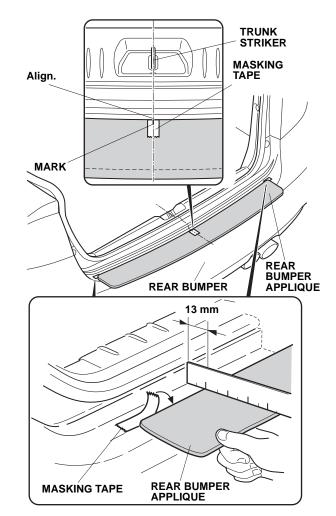


4. Remove the center backing from the rear bumper applique.




5. Place the rear bumper applique on the rear bumper as shown.

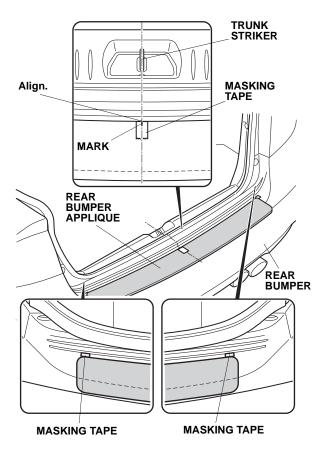

6. Remove the backing shown. Using the applicator with soft sleeve, apply pressure to smooth out the top surface of the rear bumper applique. If you see any air bubbles, gently peel up that section and work out the air bubbles.



- 7. Smooth out the other side in the same way.
- 8. Remove the backing shown. Using the applicator with soft sleeve, apply pressure to smooth out the top surface the rear bumper applique. If you see any air bubbles, gently peel up that section and work out the air bubbles.



9. Smooth out the other side in the same way.

10. Starting from the middle and working outward, use the applicator with soft sleeve to apply the rear bumper applique to the rounded rear edge as shown.

